


alerttile®

semi-rigid surface applied detectable warning

AlertTile® is a glass reinforced thermoset composite engineered for superior impact resistance, slip resistance, wear resistance and long-term durability for retrofit applications.

AlertTile®'s exclusive design incorporates a thin, slightly flexible profile with a perimeter beveled edge to provide a safe pedestrian transition.

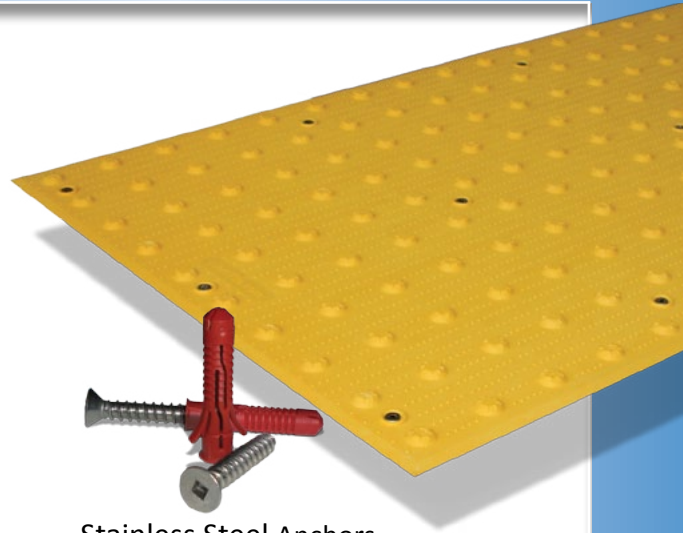

Stainless Steel Anchors

Features

- **Semi-rigid composition** – 30,000 psi strength yet flexible enough to conform to ramp irregularities
- **Premium UV Treatment**– ensures long term color retention
- **Proven Anchoring System** – premium adhesive and HILTI HUD-1 anchors with stainless steel screws
- **Perimeter Beveled Edges** – for safe pedestrian transition
- **AlertTile Universal** – uses patented Penetrator anchors for cast in place applications, allows distributors ability to stock single tile for surface and cast in place installations

Installation



Fast, easy installation with included adhesive and anchor system. Apply adhesive to scored areas on back, place in desired location and install anchors

Physical Characteristics

- **Compressive Strength** - 30,000 psi
- **Flexural Strength** - 18,000 psi
- **Dome Spacing** - 2.35" Center to Center
- **Slip Resistance** - Dry = 1.03 / Wet = .83
- **Freeze / Thaw Durability** - Pass-No change
- **Color** - Integral Throughout

Colors



Safety Yellow



Colonial Red



Brick Red




Black




Gray


Sizes




2' x 3'



2' x 4'



2' x 5'



3' x 2'

3' x 2'

3' x 4'